
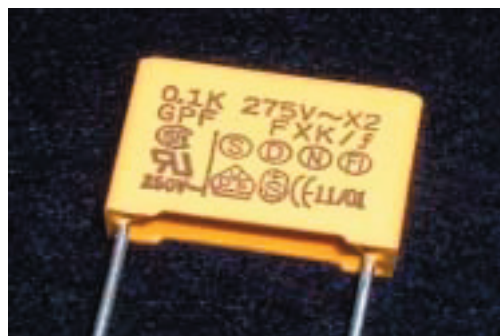


METALLIZED POLYPROPYLENE AC CAPACITOR

INTERFERENCE SUPPRESSORS CLASS X2

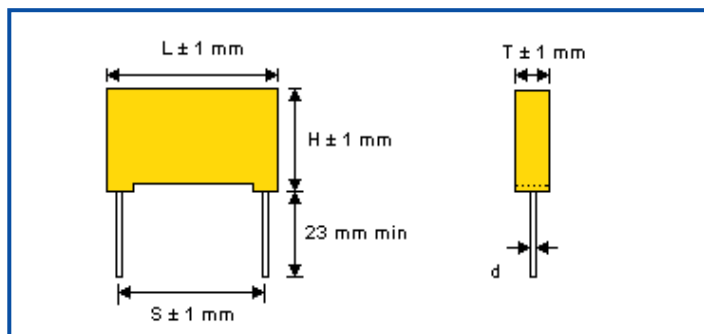

LR98611-5

13693 For 275 VAC
84657 For 250 VAC

E178496



305393-236



961505501



189703-01



P96101140



96,6 60065,01

GENERAL SPECIFICATION

1. OPERATING TEMPERATURE:

- 40 ~ + 85 degree C

2. RATED VOLTAGE:

275VAC, FOR VDE, SEV, SEMKO,
NEMKO, DEMKO, FIMKO,
250VAC, FOR, UL, CSA

3. CAPACITANCE RANGE:

0.001 ~ 1.0 Mfd

4. DIELECTRIC STRENGTH:

2000VDC for 1 sec.

5. CAPACITANCE TOLERANCE:

±10% for C ≥ .01 Mfd

±20% for C ≤ .01 Mfd (S=10mm)

6. INSULATION RESISTANCE:

C < .33 Mfd, R ≥ 9,000MΩ at 25 degree C

C ≥ .33 Mfd, RC ≥ 3,000MΩ × Mfd

7. DISSIPATION FACTOR:

0.1% max. at 1KHz, 25 degree C

VAC Mfd	250VAC / 275VAC					
	Tol.	L	T	H	S	d
0.001-0.01	M	13.0	5.0	11.0	10.0	0.6
0.01-0.012	K	18.0	5.0	11.0	15.0	0.8
0.015	K	18.0	5.0	11.0	15.0	0.8
0.018	K	18.0	5.0	11.0	15.0	0.8
0.022	K	18.0	5.0	11.0	15.0	0.8
0.027	K	18.0	5.0	11.0	15.0	0.8
0.033	K	18.0	5.0	11.0	15.0	0.8
0.039	K	18.0	5.0	11.0	15.0	0.8
0.047	K	18.0	5.0	11.0	15.0	0.8
0.056	K	18.0	5.0	11.0	15.0	0.8
0.068	K	18.0	5.0	11.0	15.0	0.8
0.082	K	18.0	6.0	12.0	15.0	0.8
0.10	K	18.0	6.0	12.0	15.0	0.8
0.12	K	18.0	7.5	13.5	15.0	0.8
0.15	K	18.0	8.5	14.5	15.0	0.8
0.22	K	18.0	9.5	15.5	15.0	0.8
0.22	K	26.5	7.0	16.5	22.5	0.8
0.27	K	26.5	8.5	17.0	22.5	0.8
0.33	K	26.5	8.5	17.0	22.5	0.8
0.39	K	26.5	10.0	19.0	22.5	0.8
0.47	K	26.5	10.0	19.0	22.5	0.8
0.56	K	32.0	11.0	20.0	27.5	0.8
0.68	K	32.0	11.0	20.0	27.5	0.8
0.82	K	32.0	13.0	22.0	27.5	0.8
1.0	K	32.0	13.0	22.0	27.5	0.8
1.0	K	32.0	16.0	25.0	27.5	0.8